




Edge Profiles

 B 3/4" only Rabbet: 7/16" deep 3/8" high	 B-2⁺ 3/4" and 1" Available w/MDF	 C 3/4" only Rabbet: 7/16" deep 3/8" high	 C-2⁺ 3/4" and 1" Available w/MDF	 CFP-2⁺ 3/4" and 1"
 E-2⁺ 3/4" and 1"	 FP 3/4" only	 H-2⁺ 3/4" and 1" Available w/MDF	 J-2⁺ 3/4" and 1"	 L-034⁺ 3/4" and 1" Available w/MDF
 L-059⁺ 3/4" and 1" Available w/MDF	 L-120⁺ 3/4" and 1"	 L-149⁺ 3/4" and 1" Available w/MDF	 L-253 3/4" and 1" 5° back bevel Available w/MDF	 L-281⁺ 3/4" and 1"
 L-382⁺ 3/4" and 1" Available w/MDF	 L-686 3/4" and 1" 5° back bevel Available w/MDF	 L-772⁺ 3/4" and 1"	 L-803⁺ 3/4" and 1" Available w/MDF	 L-1160⁺ 3/4" and 1" Available w/MDF
 LC-2⁺ 3/4" and 1" Available w/MDF	 Machine Edge⁺ 3/4" and 1" Available w/MDF	 PRS-2⁺ 3/4" and 1" Available w/MDF	 RC-2⁺ 3/4" and 1"	 V-2⁺ 3/4" and 1" Available w/MDF

Premium Edge Profiles

These three profiles require 2 additional working days.

 L-297* 3/4" and 1"	 L-304 3/4" and 1" 5° back bevel	 LC-Inset* 3/4" and 1"
---	---	--

* Drilling for concealed hinges is available on doors with these profiles.
+ FEP option available.
Images shown are not to scale.

FEP Rabbet Option

No additional lead-time.










L-149 edge with FEP rabbet option















- Designed for use as a "finished end panel" to be used with Conestoga Cabinet Systems.
- All profiles marked with a + indicate FEP rabbet option is available.
- Available on 3/4" designs only.

Not all framing beads and panel raises are available with all door designs.
Design charges include choice of framing bead and panel raise.

Framing Beads

 Regular 3/4" and 1"	 Elite 3/4" only	 Ogee 3/4" and 1"	 Square 3/4" and 1"
 F-007 3/4" only	 F-877 3/4" only	 F-1223 3/4" only	

Panel Raises (dimensions are for 3/4" doors only)

 Slant 3/4" and 1" Doors	 G-Cove 3/4" and 1" Doors	 Louis XIII 3/4" Doors only	 M-Bead 3/4" and 1" Doors
 P-008 3/4" and 1" Doors	 P-057 3/4" and 1" Doors	 P-106 3/4" Doors only	 P-125 3/4" Doors only
 P-225* 3/4" Doors only	 P-420 3/4" Doors only	 P-602 3/4" Doors only	 Presidential 3/4" Doors only
 Reverse G-Cove 3/4" and 1" Doors	 RM 3/4" and 1" Doors		

*P-225 raise not available when Colourtones, primers or Prism Paints are ordered.


All published 3/4" raises are available in hybrid products except P-106. Hybrid products consist of MDF panel and solid wood framing. 3/4" thick doors measure 5/8" finished panel thickness except Reverse G-Cove and P-057 which measure 3/8" thick and P-106 which measures 1/2" thick.

All published 1" raises available in hybrid products except P-057 and Reverse G-Cove.


1" thick doors measure 3/4" finished panel thickness except Reverse G-Cove and P-057 which measures 1/2" thick; not available with MDF panels.

Images shown are not to scale.


Options




5/16" Square and Diamond Pegs




- For F-007, F-877, F-1223, Regular, Ogee and Square framing beads, pegs will be centered on stile one half of the total width of the stile and one half of the total width of the rail.
- For Elite framing bead submit dimensioned sketch showing peg location.
- When ordering two pegs per corner, specify either diagonal square or diagonal diamond pegs.
- Peg will be sanded flush with face of framing.
- Available in all published species; peg specie must be specified.



5/16" Pyramid Pegs




- Pyramid pegs will ship loose and doors will be drilled to accept pegs.
- Pegs will be centered on stiles one half of the total width of holes for stile and in from exterior edge one half of the total width of the rail.
- For Elite framing bead submit dimensioned sketch showing peg location.
- When ordering two pegs per corner, order as diagonal pyramid pegs.
- Multi-panel doors will be drilled for one peg at each interior joint if requested.
- Available in all published species; peg specie must be specified.




Radius Corners

- Specify 1/8", 1/4", 1/2" or 1" radius.
- Available with B-2, C-2, CFP-2, H-2, L-059, L-149, L-281, L-772, L-1160, LC-2, Machine Edge, PRS-2 and V-2 edge profiles only.

Options (continued)




G-012 Panel Groove




Groove width: 1/4"
Groove depth: 1/16"

- 1-1/2" spacing from center of groove to center of groove standard. Groove pattern begins from center of panel.
- Custom spacing available upon request.




G-015 Panel Groove



Groove width: 3/32"
Groove depth: 3/64"

- 1-1/2" spacing from center of groove to center of groove standard. Groove pattern begins from center of panel.
- Custom spacing available upon request.




G-056 Panel Groove




Groove width: 3/8"
Groove depth: 1/8"

- 1-1/2" spacing from center of groove to center of groove standard. Groove pattern begins from center of panel.
- Custom spacing available upon request.





G-121 Panel Groove



Groove width: 1/4"
Groove depth: 1/8"

- 1-1/2" spacing from center of groove to center of groove standard. Groove pattern begins from center of panel.
- Not available with 1/4" panels.
- Custom spacing available upon request.

Options (continued)



Essex Rout

- Rout is machined on full length of stiles.
- Rout is approximately 3/32" wide x 1/32" deep.
- Cannot be used with applied moulding, CRP-10751MT, CRP-1389MT, Fairhaven, Madison, miter designs or Presidential series.
- Add 1 day to lead-time.


Hybrid Panel Prep & Seal Option

- Hybrid doors and drawer fronts consist of 5-piece construction utilizing solid wood framing with MDF panels. The MDF panel eliminates stave to stave glue lines that are sometimes visible after painting solid wood panels, as well as veneer seams and splits in plywood panel products.
- The Hybrid Panel Prep & Seal option eliminates the problematic step of sealing machined areas of MDF panels in an assembled door. This option is especially recommended for products utilizing raised panels.
- This Prep & Seal option consists of the application of a sealant on the machined areas of the panel. After curing, the sealant is scuff sanded to provide a smooth, finish ready surface. Normal prep sanding of the solid wood framing is still necessary.
- The Hybrid Panel Prep & Seal option is valid only with unfinished doors and drawer fronts. Hybrid products finished by Conestoga include this option.

MDF 1-Piece, 5-Piece and Hybrid Seal Coat Option

- The Hybrid and MDF Seal Coat option consists of an initial machine sanding step in the manufacturing process, followed by the application of a sealant on the face and all machined surfaces including the panel raise, framing bead and edge profile. No sealant is applied to the back and there is no further sanding after the seal coat is applied to the face. Must be scuff sanded by customer before primer is applied.
- Solid wood framing in Hybrid products may show wood characteristics such as pin knots, sap pockets on Cherry and mineral streaks.
- Testing for compatibility and adhesion between Conestoga's Seal Coat and customer's finish materials should take place on a sample door prior to finishing any large items or multi-piece projects. We recommend only **acid cured conversion varnish topcoats**. Conestoga assumes no responsibility for incorrect application of finish materials by the customer that may result in poor adhesion, color mismatch or other finish related issues. Conestoga will not warrant products due to incompatibility issues between our seal coat and non-DuraGuard finish materials.
- All 1-piece MDF, 5-piece MDF and 5-piece Hybrid doors and drawer fronts are available to receive this option.
- Option is available on Hybrid and MDF unfinished products only. 1-piece MDF products finished by Conestoga include the Seal Coat option.

Putty Pin Holes



Options (continued)

End Grain Sealant Option

- Sealer is applied to the end grain of the panel raise and framing which results in a more uniform appearance between the end grain and face grain after finish is applied. While the End Grain Sealant option will greatly improve the end grain appearance, end grain will still appear somewhat darker than non-end grain areas.
 - The End Grain Sealant option is available on all published species, panel raises, framing beads and edge profiles.
 - The End Grain Sealant option is available with wiping and spray stains with the exception of Bordeaux, Dark Roast, Espresso, Nickel and Nitefall. End Grain Sealant option is not available with Primers, Colourtones or Prism Paints.
 - Add 1 day to lead-time.
-

Wood Conditioner Option

- Available on unfinished and finished miter doors and drawer fronts that meet both the design and specie criteria listed below.
- Sanding methods used to sand the face of contoured miter framing differs from how center panels are sanded. Depending on specie and finish combinations chosen, stains sometimes absorb quite differently between components resulting in a picture frame effect.
- To minimize color contrast between framing and panels, Conestoga developed a process to apply a wood conditioning treatment to the face of contoured miter framing, crown and trim mouldings. The result is a more uniform finished appearance of all components.
- Any door design with a flat surface on the framing face (regardless of construction type) is not eligible for the Wood Conditioner option because the wide belt sanding process negates the effect of the conditioner.
- Eligible published miter designs: CRP-10191, CRP-10318, CRP-10875, CRP-10946, CRP-10334, CRP-1420, CRP-1999, LaSalle, Milan, Montclair, Prestige, Rothsford, Summit, TW-10875, Wellston and Woodridge.
- The Wood Conditioner option is limited to select Alder, Cherry, Hard Maple, Soft Maple and White Birch mitered designs.
- Eligible finishes include Autumn, Chestnut, Colonial, Cordovan, Driftwood, Ginger, Harvest Gold, Honey, Portabella, Saddle and Washington Cherry wiping stains.
- Available on unfinished miter designs and species listed above. Wood Conditioner option must be selected.
- All prefinished miter door and drawer front designs that meet the design, specie and finish criteria will automatically receive Wood Conditioner on framing. Customers have the option to decline this service, but must notify Customer Service via phone, email or through our online ordering program.
- All prefinished mouldings that meet the specie and finish criteria will automatically receive Wood Conditioner.
- The Wood Conditioner option does not include sealing center panel end grain. To further enhance the appearance of panel end grain, select the End Grain Sealant option.


Options (continued)



Weathered Grain Option

- The Weathered Grain option consists of random removal of surface material from panels, framing and edge profiles. Softer portions of the wood's surface are removed from the product's face, resulting in a highly textured look and feel.
 - On 5-piece products such as the CRP-10 door, only the face of the panel and framing and the outside edges of the door will receive the weathering process. Recessed machined areas such as panel grooves and framing beads will not be weathered.
 - Only a limited portion of our product offering including door designs, profiles and species are eligible to receive the Weathered Grain option. This offering was arrived at by running a series of tests on a wide variety of products and product options.
- ♦ Eligible 3/4" door designs: Albany, Amesbury, Bristol, Cottage, Cortland, Crossbuck, CRP-10, CRP-10 Pilaster, CRP-10102, CRP-20, CRP-30, DVG Batten, Flush Batten, Prestwick, Radcliffe, Sheldon, Slab, Stockbridge, TW-10, TW-10 Pilaster, TW-1038, TW-10716, TW-10916, TW-20 and TW-30. Select 1" thick designs and profiles available – contact Customer Service.
 - ♦ Eligible 3/4" species: Alder, Rustic Knotty Alder, Bamboo, Cherry, Rustic Knotty Cherry, Knotty Pine, Hickory, Rustic Knotty Hickory, Quarter Sawn Red Oak, Quarter Sawn White Oak, Red Oak, Rustic Knotty Red Oak, Thermally Treated Poplar, Walnut and White Oak. All species listed available in 1", except Bamboo and Thermally Treated Poplar.
 - ♦ Eligible framing beads: F-1223, Regular and Square only.
 - ♦ Eligible panel raises: P-057, Reverse G-Cove, and plywood center panels.
 - ♦ Eligible edge profiles: L-034, L-149, L-1160 and Machine Edge – edge profiles automatically receive the Weathered Grain option.
 - ♦ Eligible options with Weather Grain: back routed hand pull, concealed hinge boring, cross grain sand (back only), cut down framing, distressing levels 1 and 2, à la carte distressing options except wormhole clusters, G-012, G-015, G-056 panel grooves, knife hinge slot, pegs, putty pin holes, Soss hinge boring and wear sanding.
 - ♦ Eligible finishes: all Colourtones, Prism Paints, Truetones and wiping stains, both with and without glazes are available. Finish options include antiquing and Heirloom treatment. All finishes default to a 5° sheen topcoat, 15° sheen topcoat is also available upon request.
Note: the Weathered Grain option increases fiber raise which results in minor sand through in random areas. This is not considered defective and may actually enhance the weathered appearance.
- Maximum panel width is 26".
 - Complementary products: non-beaded front frames, raised panel valances, slab fillers, fluted fillers, mouldings, S4S cabinet framing, B09 Beaded Panel, #13 Batten, #14 Scribe, #381 Baseboard, #538 Shaker Crown, #1126 Shaker Crown, #1529 Reverse Shaker Crown, #1809 Scribe, #2073 Refacer's Moulding, #2316 Scribe and #2317 Scribe.

Options (continued)



Rendering represents example only. Distressing is a random treatment; appearance of distressing will vary from piece to piece. A physical sample should be purchased before placing an order.

Distressing

- Level 1 – a random distribution of nicks and impressions.
- Level 2 – a random distribution of nicks and impressions, simulated wormholes, razor cuts and cut joints.
- Level 3 – a random distribution of nicks and impressions, simulated wormholes, rasp marks and cracks.
- Front frames, mouldings, ornaments and range hoods will receive modified distressing. Treatments on range hoods will be limited in intensity and will vary by style of hood.
- Not eligible on 1-piece MDF, 5-piece MDF or Hybrid products.
- Add 1 day to lead-time.


Distressing À La Carte

- Any of four distressing treatments can be ordered individually, or grouped in various combinations.
- Distressing treatments create a look of aged cabinetry that has withstood years of everyday use. Each treatment option will be applied in a random fashion to simulate varying degrees of wear.
- Not eligible on 1-piece MDF, 5-piece MDF or Hybrid products.
- Distressing treatment selections can be tailored to include one, two, three or four selections from the following options:
 - ◆ **Nicks and Impressions** – a number of indentations and nicks will be randomly applied across the face of the door or drawer front. Indentations of various shapes and sizes will be found on framing and panel.
 - ◆ **Rasp Marks** – located on the exterior edges of doors and drawer fronts, rasp marks are created by applying downward pressure on a large-tooth file which is dragged at an angle across the edge of the door's exterior profile.
 - ◆ **Razor Cuts & Cut Joints** – will give the appearance of splits or surface cracks radiating from the ends of framing or panel and will run parallel to the grain. Random cuts typically range from 2-1/2" to 5" in length and may vary in width. Cut joints consist of highlighting or widening random joints with a utility knife to create a look of joints that have slightly opened from years of stress and frequent use.
 - ◆ **Wormhole Clusters** – appearance of wormhole clusters will be spaced randomly on the face of the door or drawer front. Clusters will vary in size, shape and appearance.

Options (continued)

Cross Grain Sanding

- The Cross Grain Sanding option is available only on unfinished doors and drawer fronts.
- Please note, even with cross grain removal, doors are not finish-room ready. To prepare properly for finishing, we recommend a light white wood sand.





Wear Sanding

- The Wear Sanding option provides an aged appearance to unfinished doors and drawer fronts. On raised panel designs, sanding is applied to the corners of the panel and the outside corners of the framing. Recessed panels, mullions and frame only designs will receive sanding on the outside corners of the frame. Sanding will be random and each corner will vary in appearance.
- Wear Sanding is available on range hoods, but will be limited in intensity depending on the style of hood selected.
- Wear Sanding is not available on front frames.

Antiquing



- Antiquing is a random post-finish sanding treatment that exposes raw wood corners and edges. This treatment provides a complementary worn look to our distressing packages.
- To achieve a heavier level antiquing, combine this option with the Wear Sanding option.
- Antiquing is not available on front frames.
- Antiquing is available on range hoods, but will be limited in intensity and will vary by style of hood.

Options (continued)



Back Routed Hand Pull

- Specify location: top or bottom and left, right or centered.
- Rout is 3-5/8" wide and 3/8" deep. When specifying left or right hand, pull will start 3" in from edge of door. Hand pull is centered on doors less than 10" wide.
- Available with all published edge profiles except B, C, E-2, FP, L-253, L-304, L-686, L-947 and RC-2.
- Add 1 day to lead-time.



Face Routed Hand Pull

- Specify location: top or bottom and left, right or centered.
- Rout is 4-1/2" wide and 1/2" deep. When specifying left or right, hand pull will start 3" in from edge of door. Hand pull is centered on doors less than 10" wide.
- Available with all published edge profiles except B, C, E-2, FP, J-2, L-120, L-253, L-281, L-297, L-304, L-382, L-686, L-772, L-947, L-1160 and LC-Inset.
- Add 1 day to lead-time.

7

Design Options

Non-standard Width Framing

Non-standard Width Framing (1-1/4" minimum size) <i>Only available on mortise and tenon constructed doors</i>	
Width	
1-1/4" to std. width	
Std. width to 6-7/16"	
6-1/2" to 8-3/4"	
*8-13/16" and wider	

*Stiles 8-13/16" wide and over automatically receive a mullion-type spline as a structural reinforcement.


Wider Framing CRP-10751MT, CRP-1389MT, Madison, Presidential & SavannahMT	
Framing Width	
Std. width to 6-7/16"	
6-1/2" to 8-3/4"	
*8-13/16" and wider	

Add 4 days to lead-time.

Glued up framing may be used on wide framed product. The chart below lists the number of glue joints that will be considered acceptable.


Framing Glue Joint Parameters	
Finish Width of Framing	No. of Glue Joints Acceptable
2-3/8" to 4" width	1 glue joint is acceptable
4-1/16" to 6" width	2 glue joints are acceptable
Over 6" in width	2 or more glue joints are acceptable

Options (continued)




Cut Down (Width or Height)

- The Cut Down option is available on mortise and tenon doors and drawer fronts that are manufactured to the minimum size and cut down to achieve a smaller size. This option is not available for mitered designs.

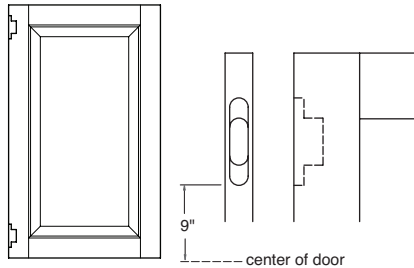

Soss Hinge Boring


- The routs are placed 9" off center, measured from the vertical center of the door to the start of the rout.
- Not available on doors over 42" high or under 25-1/8" high.




Concealed Hinge Boring: Pattern "A" 2.5mm

- Hole placement primarily designed for framed cabinetry.
- Boring consists of a 35mm diameter hole, 13.5mm deep with a 2.5mm tab dimension from the edge of the door.
- Insert holes are 8mm in diameter, 11.9mm deep, located 9.5mm from the center of the 35mm bore to the center of the 8mm insert bore.
- Specify with insert holes or cup only.
- Doors 8-13/16"– 42" long receive two bores.
- Doors 42-1/16"– 72" receive three bores.
- Doors 72-1/16" and longer receive four bores with center holes set 25" in from each end.
- Boring available on the following edge profiles only: B-2, CFP-2, L-034, L-059, L-149, L-281, L-297, L-382, L-803, L-1160, LC-2, LC-Inset, Machine Edge, PRS-2 and V-2.
- Concealed Hinge Boring is available on inset/prefit doors. Pattern "A" with or without insert holes, L-149, L-1160 and Machine Edge only.
- Pattern "A" accommodates the following hinge models for framed cabinetry:
 - Blum: Compact 33, 38C, 38N and 39C series
 - Grass: TEC series
 - Amerock: Matrix and 2811 series
 - Mepla: ACC162 (screw-in version)
 - Salice: "S" series
 - Ferrari: ET series and Compacta
- Custom boring locations available. Specify dimension from top or bottom edge of door to center of cup locations.


With insert holes




Cup Only




Options (continued)



With insert holes




Cup Only



Concealed Hinge Boring: Pattern "B" 5mm

- Hole placement primarily designed for frameless cabinetry.
- Boring consists of a 35mm diameter hole, 13.5mm deep with a 5mm tab dimension from the edge of the door.
- Insert holes are 8mm in diameter, 11.9mm deep, located 9.5mm from the center of the 35mm bore to the center of the 8mm insert bore.
- Specify with insert holes or cup only.
- Doors 8-13/16"– 42" receive two bores.
- Doors 42-1/16"– 72" receive three bores with the third centered on the height of the door.
- Doors 72-1/16" and greater receive four bores with center holes set 25" in from each end.
- Boring available on the following edge profiles only: B-2, CFP-2, H-2, L-034, L-059, L-149, L-281, L-297, L-382, L-803, L-1160, LC-2, LC-Inset, Machine Edge, PRS-2 and V-2.
- Concealed Hinge Boring is available on inset/prefit doors with the following edge profiles: L-149, L-253, L-686, Machine Edge, L-947, L-967, L-304, L-996 and L-1160.
- Pattern "B" accommodates the following hinge models for frameless cabinetry:
 - Blum: 107, 120, 120+, 170, Diagonal 20, 30, 37, 45, Angle 25 and CLIP Top series
 - Grass: TEC, Nexis and Tiomos Series
 - Salice: 200 series (use 2mm mounting plate)
 - Ferrari: Anyway Clip series
- Custom boring locations available. Specify dimension from top or bottom edge of door to center of cup locations.




Concealed Hinge Boring: Pattern "C" 5mm


- Hole placement primarily designed for frameless cabinetry.
- Boring consists of a 35mm diameter hole, 13.5mm deep with a 5mm tab dimension from the edge of the door.
- Insert holes are 8mm in diameter, 11.9mm deep, located 9.5mm from the center of the 35mm bore to the center of the 8mm insert bore.
- Specify with insert holes or cup only.
- Doors 8-13/16"– 42" receive two bores.
- Doors 42-1/16"– 72" receive three bores with the third centered on the height of the door.

Options (continued)

With insert holes




Cup Only



Concealed Hinge Boring: Pattern "C" 5mm (continued)

- Doors 72-1/16" and greater receive four bores with center holes set 25" in from each end.
- Boring available on the following edge profiles only: B-2, CFP-2, H-2, L-034, L-059, L-149, L-281, L-297, L-382, L-803, L-1160, LC-2, LC-Inset, Machine Edge, PRS-2 and V-2.
- Concealed Hinge Boring is available on inset/prefit doors with the following edge profiles: L-034, L-149, L-253, L-686, Machine Edge, L-947, L-967, L-304, L-996 and L-1160.
- Pattern "C" accommodates the following hinge models for frameless cabinetry:
 - Blum: 107, 120, 120+, 170, Diagonal 20, 30, 37, 45, Angle 25 and CLIP Top series
 - Grass: TEC, Nexis and Tiomos series
 - Salice: 200 series (use 2mm mounting plate)
 - Ferrari: Anyway Clip series
- Custom boring locations available. Specify dimension from top or bottom edge of door to center of cup locations.

Knife Hinge Slot

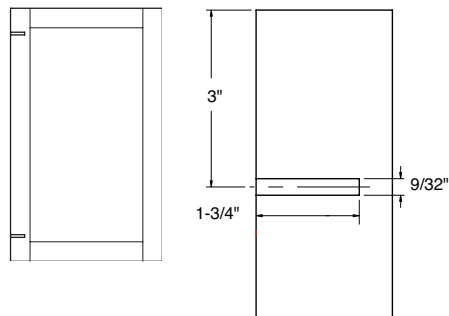

- Knife Hinge Slot is 9/32" wide, 37/64" deep and 1-3/4" long. Placement is 3" from edge of door to the center of slot.
- Doors 9" – 35-15/16" receive two slots.
- Doors 36" – 51-15/16" receive three slots with third slot centered.
- Doors 52" and greater receive four slots with center slots spaced evenly between outside slots.
- Knife Hinge Slot will accommodate the following hinges:
 - Youngdale: 5 and 6 hinge
- Available with the following edge profiles only: B-2, C-2, CFP-2, E-2, H-2, J-2, L-034, L-120, L-149, L-281, L-297, L-382, L-772, L-803, L-1160, LC-2, LC-Inset, Machine Edge, PRS-2 and V-2.
- Not available on framing less than 2-5/16" in width or with cut down framing option.
- Frame only and mullion designs require minimum framing width or 2-3/4".
- Not available in frame only or mullion designs, doors under 9" high, Batten doors, CRP-10605 and CWS-10446.

Options (continued)




Sample ID Label

- The Sample ID Label option identifies specific attributes of door and drawer front samples. Labels are tack-free and easy to remove. It is intended to be replaced with your company's customized label.
- Available on doors and drawer fronts only; this option is not available on aluminum frame doors, specialty or accessory products.
- ID labels are available on unfinished and finished doors and drawer fronts.
- Sample ID labels include Conestoga nomenclature, customization is not available.
- Each label includes: Conestoga design, specie/grade, bead, raise, edge profile, selected options, finishing information and package date.
- All finished doors or drawer fronts will receive a second disclaimer label along with an ID label.

7

Design Options

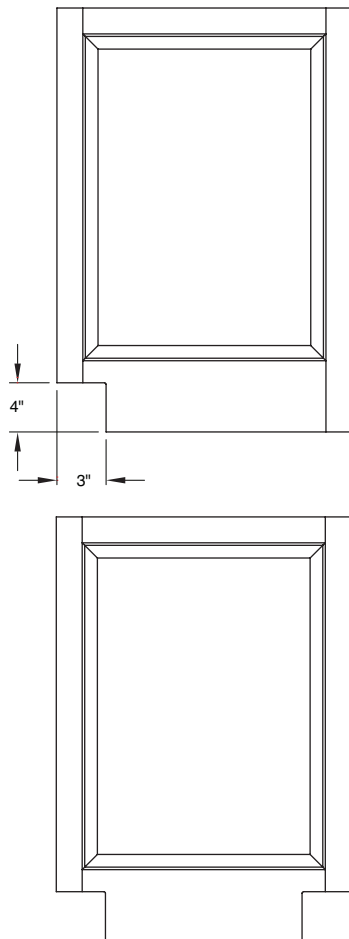

Toe Kick Notch

- Available in 3/4" thick 5-piece mortise and tenon doors with square bottom rails and Slab doors only.
- Standard Toe Kick Notch option is 3" deep by 4" high and requires a bottom rail of 6" wide or greater. All other dimensions within the minimum and maximum depths and heights will be processed by Special Designs at no upcharge.
- Toe Kick Notch sizing is available in 1/16" increments.
- Minimum custom notch size is 2" deep by 2" high. Maximum custom notch size is 6" deep by 10" high.
- Width of bottom rail must exceed height of Toe Kick Notch by at least 2" to ensure joint integrity.
- Specify location of notch – left side, right side or with both left and right side notched.
- The inside corner of the Toe Kick Notch option will have a 1/8" radius.
- Toe Kick Notch option not valid with hinge boring.